

**Two Valve Manifolds  
Remote mount (Pipe to Pipe)**






**Features:**

With threaded vertical port inlet & female outlet. The vent/test connection is positioned on the front side. The venting bonnet is positioned on the right side & isolated bonnet on left hand side.

**Standard Parameters:**

Product	: 2VM
Process side	: 1/2" NPT[M]
Instrument side	: 1/2" NPT [F]
Vent/Test	: 1/4" NPT [F]

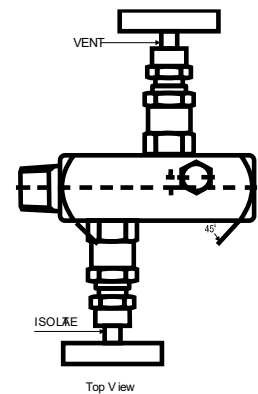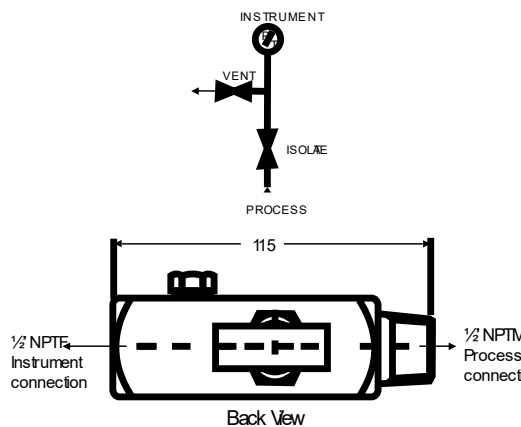

**Specifications Standard version:**

Body	: SS 316
Stem	: SS 316
Valve Assembly	: SS 316
'T' bar handle	: SS 304
Maximum working Pressure	: 6000 PSI
Maximum working Temp.	: 240° C
Packing	: PTFE
Type of Stem	: Type CT; Stem with conical metal tip
Drain port	: 1/4" NPT[F]; with SS 316 plug

Ordering codes

<b>1. Body material</b>		<b>S6</b>	<b>4. Options</b>		<b>MT</b>
<b>CS</b>	Carbon Steel		<b>OS</b>	Oxygen Service	
<b>S6</b>	SS 316		<b>MT</b>	Material test certificate	
<b>S4</b>	SS 304		<b>HG</b>	Hydro test Certificate	
<b>Mo4</b>	Monel 400				
<b>Mo5</b>	Monel 500				
<b>HC</b>	Hastelloy C				
<b>2. Stem packing</b>		<b>P</b>			
<b>P</b>	PTFE				
<b>G</b>	Grafoil				
<b>3. Size = Inlet x outlet</b>		<b>06B.06B</b>			
<b>06B.06B</b>	1/4" BSP[M] x 1/4" BSP[M]				
<b>10B.10B</b>	3/8" BSP[M] x 3/8" BSP[M]				
<b>15B.15B</b>	1/2" BSP[M] x 1/2" BSP[M]				
<b>20B.20B</b>	3/4" BSP[M] x 3/4" BSP[M]				

**Ordering Example: 2VM-S6-P-06B.06B-MT**

Note: Specifications and dimensions given in this product catalogue represents the state of engineering at the time of printing. Modifications may take place and materials specified may be replaced by others without prior notice.